

Link do produktu: <https://cardsplitter.pl/profesjonalny-miernik-sygnału-combo-satlink-ws6980-p-3720.html>

Profesjonalny miernik sygnału COMBO SATLINK WS6980



Cena	1 669,99 zł
------	--------------------

Numer katalogowy	WS6980
------------------	---------------

Kod producenta	CHE
----------------	------------

Producent	SatLink
-----------	----------------

Opis produktu

Profesjonalny miernik sygnału COMBO SATLINK WS6980




Profesjonalny miernik sygnału firmy Satlink model WS-6980 COMBO z kolorowym wyświetlaczem LCD pozwalający łatwo i precyzyjnie ustawić antenę satelitarną lub naziemną. Miernik posiada wpisane kilkanaście pozycji satelitarnych (satelity + transpondery), dodatkowo jest możliwość edycji każdego parametru. Model WS-6980 COMBO posiada pomiar kanałów DVB-S2/T2/C. W komplecie zasilacz oraz przewód zasilający do kamer 12V. Menu miernika w języku polskim, co ułatwia jego obsługę.

Miernik wyposażony w komplet wejść i wyjść, takich jak:


- WEJŚCIE AV
- WEJŚCIE HDMI (do podglądu sygnału z tunera)
- WEJŚCIE OPTYCZNE
- WYJŚCIE 12 V DO ZASILANIA KAMER
- WEJŚCIE DVB-T2/C
- WEJŚCIE DVB-S2
- WYJŚCIE HDMI

- WYJŚCIE AV
- PORT USB
- WEJŚCIE NA ZASILACZ
- LATARKA
- GŁOŚNIKI

MIERNIK WS6980 UMOŻLIWIA POMIAR WIDMA ORAZ KONSTELACJI DLA DVB-S2/T2/C

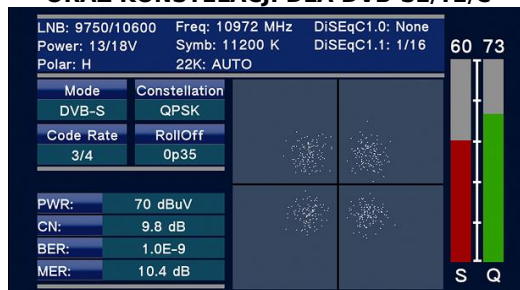

WYŚWIETLANIE PARAMETRÓW SYGNAŁU JEST BARDZO CZYTELNE

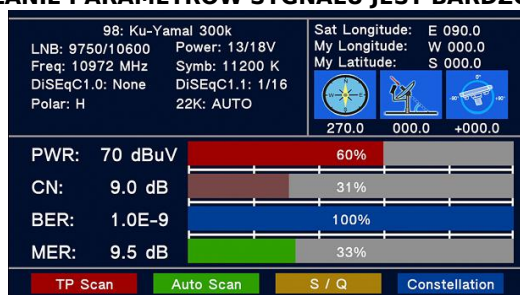

Specyfikacja:

- miernik DVB-S2 DVB-T2 DVB-C HD Mpeg4 combo
- wskazanie siły i jakości sygnału
- procentowe wskazanie jakości sygnału
- sygnał dźwiękowy znalezienia satelity (możliwość wyłączenia)
- bateria LI-ION (7,4V 3000mAh)
- możliwość edycji satelity, transpondera, częstotliwości
- obsługa DiSEqC: 1.0, 1.1, 1.2 oraz 22 kHz
- możliwość zaktualizowania oprogramowania poprzez złącze USB
- łatwy w przenoszeniu



Product Description:

- Standards: DVB-S2/S, DVB-T/T2 DVB-C
- Connector Type F Type
- Input Frequency 950 to 2150 MHz
- Signal Input Level - 65 to -25 dBm
- Band Switch Control 22KHz
- LNB Supply 13V/18V, IMax 400mA

-
- Demodulation Type QPSK, 8PSK, 16APSK
 - Symbol Rate 2
 - Connector Type FEMALE Type
 - Input Frequency 48 to 862 MHz
 - Signal Input Level -79.5dBm (MAX)
 - ANT Supply 5V, 12V/17V I_{max} 100mA
 - Demodulation Type QPSK, 16QAM, 64QAM, 256QAM
 - LCD Type TFT TRANSMISSIVE
 - Number of Dots 480(RGB) x272
 - Activearea (WxH) 95.04x53.86 mm²
 - Connector Type 3.5 mm jack
 - Video Output CVBS,
 - Audio output Stereo Audio L/R output
 - HDMI output connector
 - Format HDMI 1.3a
 - Connector Type 3.5 mm jack
 - Video input CVBS,
 - Audio input Stereo Audio L/R input
 - Video decompression MPEG-2 MP@HL, MPEG-1 Decoding, MPEG-4 ASP@L5 HD resolution, H.264 MP&HP@L4, HW JPEG decoding
 - Resolving rate PAL-25 frame@720*576, NTSC-30 frame@720*480,
 - Signal compatibility Support conversion for different video formats
 - Video Format 4:3, 16:9, By Pan & Scan and Letter Box conversion
 - Audio decompression MPEG-1 Layer I/II MPEG-2 Layer I/II,
 - Audio output mode Stereo, Mono, R/L
 - Connector USB
 - Data protocol USB2.0 interface
 - File management system NTFS, FAT32, FAT16
 - File format wma, mp3, mp4, avi, jpg, jpeg, bmp, img
 - Microprocessor NOVATEK
 - Clock Frequency 500MHz
 - SDRAM Memory 1Gbit DDR3
 - Li-Ion Battery 7.4V/3000mAh (The machine behind labeling shall prevail)
 - Adapter OUTPUT: DC12V/1.5A, INTUPT: 100-240VAC 50/60Hz(Will be subject to actual configuration)
 - Power consumption Max. 10W
 - Size (W x D x H) 9.5x15.5x4.5 (cm³)